Professional CCTV 19" LCD Display

- Crisp picture performance
- High resolution, high contrast ratio
- Stylish and portable design
- NTSC/PAL auto mode
- Universal power supply (VESA DPMS compatible)
- Multiple mechanical design for various installation
- User friendly one level operation in OSD
- 7 language OSD control
- NTSC/PAL 3D Comb filter compatible
- Strengthen glass (Option)
- 3D comb filter compatible with NTSC/PAL/SECAM

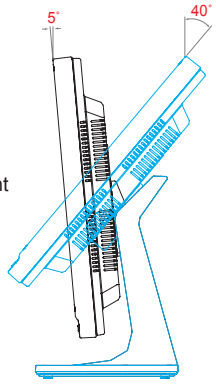

Stand Base (-5˚~40˚)
Standard Plate With Patent Tilt Adjustment -5˚~40˚ is Designed for Different Viewing Angles of Various Applications.

MODEL	LPL-19W01
LCD Display	19" Active Matrix TFT LCD Panel
Pixel pitch	1280(H)×1024(V) SXGA
Max. Resolution	500TVL
Scan Freq. Horizontal	31.5KHz~80KHz
Vertical	56~75Hz
Contrast	550:1
Brightness	400cd/m² (Typ.)
Response Time Tr / Tf	5.6/2.4ms
Display Color	16.2M
Viewing Angle L/R	70˚(H) / 70˚(V)
Viewing Angle Up/Down	75˚ / 60˚
Lamp Life Time	50,000hrs(Typ.)
Display Mode	VGA, Video & S-Video
Signal Connector	VGA In, BNC In/Out, Y/C In/Out, Audio In/Out
Front Control Panel Buttons	Power on / off / Mode / Auto, Up (Contrast Adjust), Down (Brightness Adjust), Menu.
OSD Menu (VGA)	Brightness, Contrast, H-Position, V-Position, Clock, Phase, Color Temp, User Color R, User Color G, User Color B, OSD H-Pos, OSD V-Pos, Volume, Language, Recall.
(Video)	Color, Tint (NTSC only), Brightness, Contrast, Sharpness, Volume, Language, Color Temp, Recall.
Power Input	DC Input: 12V / 4.16A, 50 / 60Hz.
Operating Condition	Temperature: 0˚C~ 40˚C, Humidity: 20% ~ 85%.
Storage Condition	Temperature: -20˚C~ 60˚C, Humidity: 20% ~ 85%.
Power Consumption	40W (Max.)
Dimension	424 (W) x 419 (H) x 170 (D)mm
Optional Signal Connector	DVI In, Order Ref. : LPL-19D01

Specification subject to change without notice.

Optional Accessories

Rack Mounting Bracket

ERK-19





DW-170 (Three knuckles for adjusting)



DW-171 (Two knuckles for adjusting)



Packing
DW-170:1pc/box, 8pcs/carton G.W.: 14.7kgs, 1.27'
DW-171:1pc/box, 12pcs/carton G.W.: 17kgs, 1.3'

Wall mount Bracket
- Firmly fix on solid wall
- Meets VESA standards Mounting spec. provided is 75mm X 75mm
- Adjusting: 1. Swivel left & right total 180˚
  2. LCD monitor swivel 270˚
  3. Pivot upwards & downwards
- Holds LCD Monitor up to 12 Kgs

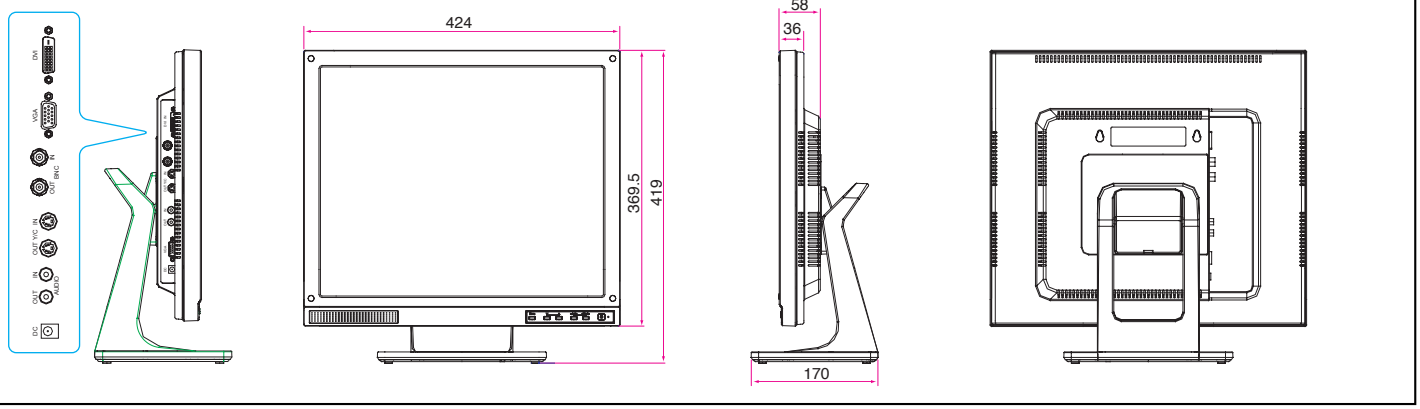

2006.02

VIDEO SOLUTION PROVIDER
台灣視訊系統股份有限公司
TAIWAN VIDEO SYSTEM CO., LTD.
http: //www.tvs.com.tw e-mail: info@tvs.com.tw

TVS GROUP
USA TVSA e-mail: info@eversun.com
Germany TVSG e-mail: info@tvsg.de
China TVSC e-mail: info@tvsc.com.cn

ISO 9001
ISO 14001